

LiFi STA 40-02

Light Emitting Plasma™ for areas where mid-range lumens are required



- Energy Efficient
- Long Life – 30,000 hours
- Color Rendering of 94 CRI
- Compact Emitting Area (1/4" x 1/2")
- Forward Directional Output
- Dimmable to 20%
- Rapid Start and Re-strike
- Digitally Controlled
- 14,000 Directional Lumens

Ideal for growth lighting and aquarium lighting




LiFi STA 40-02

Product Data



Part Description	LiFi® light source
Ordering Codes	LiFi-STA-40-02
Source Length	86.5 mm
Source Diameter	100 mm
Driver Unit L × W × H	193 × 85 × 32 mm
Rated Average Life	30,000 hours
Total Initial Lumens	14,000 lumens
Turn-on time	<60 seconds
CCT	5300 K
CRI	94
Dimming Range ¹	20-100%
DC Power at 28v(2)	256 watts
AC Power @ 277v	273 watts
DC Input Voltage	28
Input Current (A)	9.5
Orientation	universal

Spectral Power Distribution

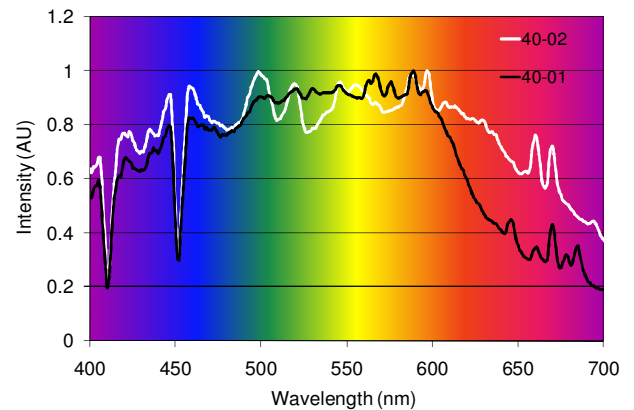

1. Digital and 1-10v analog control for smart lighting applications.
2. LiFi system DC Power. Additional power supply required for AC operation

